

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 727 502 A1

(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:

21.08.1996 Bulletin 1996/34

(51) Int. Cl.⁶: C22C 38/00, C22C 38/02,
C22C 38/32

(21) Application number: 95924505.1

(86) International application number:
PCT/JP95/01341

(22) Date of filing: 05.07.1995

(87) International publication number:
WO 96/01335 (18.01.1996 Gazette 1996/04)(84) Designated Contracting States:
DE FR GB

(30) Priority: 05.07.1994 JP 153831/94

(71) Applicant: KAWASAKI STEEL CORPORATION
Chuo-ku, Kobe-shi, Hyogo 651 (JP)

(72) Inventors:

- FUJISAWA, Mitsuyuki
Kawasaki Steel Corporation
Chiba-shi Chiba 260 (JP)
- KATO, Yasushi
Kawasaki Steel Corporation
Chiba-shi Chiba 260 (JP)


- UJIRO, Takumi
Kawasaki Steel Corporation
Chiba-shi Chiba 260 (JP)
- SATOH, Susumu
Kawasaki Steel Corporation
Chiba-shi Chiba 260 (JP)
- YAMATO, Koji
Kawasaki Steel Corporation
Chiba-shi, Chiba 260 (JP)

(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) CHROMIUM STEEL SHEET EXCELLENT IN PRESS FORMABILITY

(57) A chromium steel sheet excellent in press formability, particularly, in both of deep drawability and resistance to secondary operation brittleness. The sheet contains, on the weight basis, at most 0.03 % of C, at most 1.0 % of Si, at most 1.0 % of Mn, at most 0.05 % of P, at most 0.015 % of S, at most 0.10 % of Al, at most 0.02 % of N, 5 - 60 % of Cr, 4(C+N)-0.5 % of Ti, 0.003 - 0.20 % of Nb, 0.0002 - 0.005 % of B, and optionally further at least one member selected from among 0.01 - 5.0 % of Mo, 0.0005 - 0.01 % of Ca and 0.0005 - 0.025 % of Se, and the balance consisting of Fe and inevitable impurities.

Fig. 1

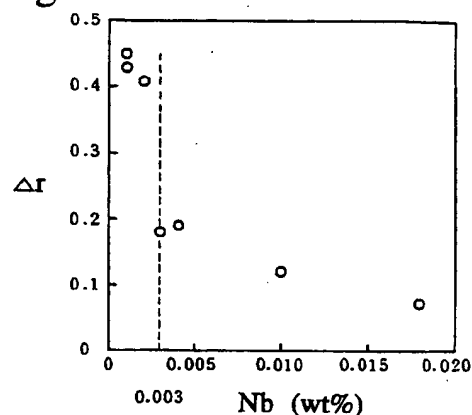

EP 0 727 502 A1

Description

TECHNICAL FIELD

5 This invention relates to chromium steel sheets (inclusive of steel strips) having an excellent press formability, particularly excellent deep-drawing formability and resistance to secondary working brittleness.

BACKGROUND ART

10 As a typical kind of the chromium steel sheets, ferritic stainless steel sheets are usually produced through steps of hot rolling - annealing of hot rolled sheet - cold rolling - finish annealing after the heating of continuously cast slab.

In general, the thus produced ferritic stainless steel is excellent in the resistance to stress corrosion cracking and is cheap, so that it is widely used to applications such as various kitchenwares, automobile parts and the like. However, the steel is particularly subjected to a severer deep drawing in the application such as fuel filter casing for automobile
15 and the like, so that there is frequently caused a problem of creating cracks due to secondary working brittleness.

Therefore, there have made many attempts in order to improve the deep-drawing formability and the resistance to secondary working brittleness in the ferritic stainless steel sheets.

For example, JP-B-54-11770 has proposed a production technique of ferritic stainless steel sheets aiming at a high cold workability by addition of Ti, while JP-B-57-55787 has proposed a production technique of ferritic stainless steel sheets aiming at a high Lankford value (hereinafter abbreviated as "r-value" simply) by addition of B. Furthermore, JP-B-2-7391 has proposed a production technique of ferritic stainless steel sheets hardly creating brittle cracks in the bulging after the deep drawing by addition of Ti and B.

However, these techniques have problems as mentioned below. That is, the brittle cracks are frequently observed at the secondary working after the severer deep drawing in the technique disclosed in JP-B-54-11770. Further, the technique disclosed in JP-B-57-55787 is unsuitable for the severer deep drawing because the deep drawability is insufficient. And also, the addition of Ti and B is conducted in the technique disclosed in JP-B-2-7391, but either deep drawability or resistance to secondary work brittleness is poor and both the properties are not simultaneously satisfied. Moreover, these techniques have a problem that the plane anisotropy of r-value (hereinafter abbreviated as " Δr " simply) is not sufficiently improved.

30 As mentioned above, all of the above techniques improves either the deep-drawing formability or the resistance to secondary work brittleness, but have the common problem that both the properties are not simultaneously improved. Therefore, the occurrence of brittle cracks in the subsequent secondary working is apprehended after the severer deep drawing.

It is, therefore, an object of the invention to provide chromium steel sheets having excellent press formability, particularly deep-drawing formability and resistance to secondary work brittleness.

It is another object of the invention to provide chromium steel sheets satisfying r-value of not less than 1.5, Δr of not more than 0.3 and a brittle crack creating temperature of not higher than -50°C .

DISCLOSURE OF INVENTION

40 The inventors have made various studies in order to achieve the above objects and found that the deep-drawing formability and the resistance to secondary work brittleness are simultaneously improved and further the ductility of weld portion is improved by controlling the chemical composition of the chromium steel sheet to a proper range, and as a result the invention has been accomplished.

45 The chromium steel sheet having the above properties has the following point and construction:

(1) The invention is a chromium steel sheet comprising;

50 C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%,
and the balance being Fe and inevitable impurities.

(2) The invention is a chromium steel sheet further containing Mo: 0.01-5.0 wt% in addition to the main ingredient of the above item (1).

55 (3) The invention is a chromium steel sheet further containing Ca: 0.0005-0.01 wt% in addition to the main ingredient of the above item (1).

(4) The invention is a chromium steel sheet further containing Se: 0.0005-0.025 wt% in addition to the main ingredients of the above item (1).

(5) The invention is a chromium steel sheet further containing Mo: 0.01-5.0 wt% and Ca: 0.0005-0.01 wt% in addition to the main ingredient of the above item (1).

- (6) The invention is a chromium steel sheet further containing Mo: 0.01-5.0 wt% and Se: 0.0005-0.025 wt% in addition to the main ingredient of the above item (1).
- (7) The invention is a chromium steel sheet further containing Ca: 0.0005-0.01 wt% and Se: 0.0005-0.025 wt% in addition to the main ingredients of the above item (1).
- 5 (8) The invention is a chromium steel sheet further containing Mo: 0.01-5.0 wt%, Ca: 0.0005-0.01 wt% and Se: 0.0005-0.025 wt% in addition to the main ingredients of the above item (1).
- (9) The invention is a chromium steel sheet wherein Mo content in anyone of the above items (2), (5), (6) and (8) is 0.1-3.0 wt%.
- 10 (10) The invention is a chromium steel sheet wherein a relationship between Ti content and Nb content in anyone of the above items (1)-(9) satisfies $Ti/Nb \geq 7$.

BRIEF DESCRIPTION OF DRAWINGS

- Fig. 1 is a graph showing an influence of Nb content upon Δr ; Fig. 2 is a graph showing a relationship between r-value and crack creating temperature; and Fig. 3 is a diagrammatical view illustrating a method of repetitive bending test.

BEST MODE FOR CARRYING OUT THE INVENTION

- 20 The preferable conditions for carrying out the invention will be described below.
- The chromium steel sheets according to the invention explained in the above item "DISCLOSURE OF INVENTION" are excellent in the press formability, particularly the deep-drawing formability and resistance to secondary work brittleness, and satisfy the r-value of not less than 1.5, the Δr of not more than 0.3 and the brittle crack creating temperature of not higher than -50°C.
- 25 The action of each ingredient element and the reason on the numerical limitation in the invention will be described below.
- C: not more than 0.03 wt%;
- 30 C is an element lowering the r-value and elongation property. Particularly, when it exceeds 0.03 wt%, the influence is conspicuous, so that the content is necessary to be not more than 0.03 wt%. Preferably, it is not more than 0.01 wt%.
- Si: not more than 1.0 wt%;
- 35 Si is an element effective for deoxidation. The excessive addition brings about the degradation of the cold workability, so that the addition range is not more than 1.0 wt%, preferably not more than 0.5 wt%.
- Mn: not more than 1.0 wt%;
- 40 Mn is an element effective for precipitating and fixing S existent in the steel to maintain the hot rolling property. The excessive addition brings about the degradation of the cold workability, so that the addition range is not more than 1.0 wt%, preferably not more than 0.5 wt%.
- P: not more than 0.05 wt%;
- 45 P is an element harmful for hot workability. Particularly, when it exceeds 0.05 wt%, the influence becomes conspicuous, so that the content is not more than 0.05 wt%, preferably not more than 0.04 wt%.
- S: not more than 0.015 wt%;
- 50 S segregates in a crystal grain boundary to promote grain boundary brittleness and is a harmful element. Particularly, when it exceeds 0.015 wt%, the influence becomes conspicuous, so that the content is not more than 0.015 wt%, preferably not more than 0.008 wt%.
- 55 Al: not more than 0.10 wt%;
- Al is an element effective for deoxidation. The excessive addition brings about the surface defect due to the increase of Al inclusions, so that the content is not more than 0.10 wt%, preferably not more than 0.07 wt%.

N: not more than 0.02 wt%;

N is an element harmful for the deep-drawing formability likewise C. Particularly, when it exceeds 0.02 wt%, the influence becomes conspicuous, so that the content is necessary to be not more than 0.02 wt%. Preferably, it is not more than 0.01 wt%.

Cr: 5-60 wt%;

Cr is an element necessary for ensuring the corrosion resistance as the stainless steel. When the content is less than 5 wt%, the corrosion resistance is lacking, while when it exceeds 60 wt%, the cold workability is degraded, so that the addition range is 5-60 wt%, preferably 10-45 wt%.

Ti: $4(C+N) - 0.5$ wt%;

Ti is an element useful for precipitating and fixing C, N harmful for the deep-drawing formability to ensure the highly deep-drawing formability. The effect is not obtained in an amount of less than $4(C+N)$ wt%, while the effect is saturated and the productivity lowers when it exceeds 0.5 wt%. Therefore, the addition amount of Ti is $4(C+N) - 0.5$ wt%, preferably $4(C+N) - 0.3$ wt%.

Nb: 0.003-0.020 wt%;

Nb is an element particularly important for simultaneously improving the deep-drawing formability and the resistance to secondary work brittleness by composite addition with Ti, B and the like in the invention. The effect is not obtained in an amount of less than 0.003 wt%, while the effect is saturated and the production cost is rather increased when it exceeds 0.020 wt%. The addition amount of Nb is 0.003-0.020 wt%, preferably 0.004-0.018 wt%.

The effect of Nb on the deep-drawing formability and the resistance to secondary work brittleness is explained in detail with reference to the figure. Fig. 1 shows an influence of Nb on Δr in a cold rolled steel sheet (cold reduction through work rolls having a roll diameter of not less than 150 mm: 82.5%) containing (0.007-0.009)wt%C - (0.3-0.4)wt%Si - (0.3-0.4)wt%Mn - (0.02-0.03)wt%P - (0.005-0.007)wt%S - (0.02-0.03)wt%Al - (0.0070-0.0090)wt%N - (16-18)wt%Cr - (0.15-0.17)wt%Ti - (0.0008-0.0010)wt%B. From Fig. 1, it is apparent that Δr is considerably improved by adding Nb of not less than 0.003 wt% and hence the edge shape after the deep drawing is largely improved.

Further, Fig. 2 shows an influence of Nb amount upon a relationship between brittle crack and r-value after secondary work of a cold rolled steel sheet (cold reduction through work rolls having a roll diameter of not less than 150 mm: 82.5%) containing (0.007-0.009)wt%C - (0.3-0.4)wt%Si - (0.3-0.4)wt%Mn - (0.02-0.03)wt%P - (0.005-0.007)wt%S - (0.02-0.03)wt%Al - (0.0070-0.0090)wt%N - (16-18)wt%Cr - (0.15-0.17)wt%Ti - (0.001-0.018)wt%B. From Fig. 2, it is apparent that the steel sheets containing not less than 0.003 wt% of Nb are high in the r-value as a forming limit indication in the deep drawing and low in the brittle crack creating temperature.

As mentioned above, both the deep-drawing formability and the resistance to secondary work brittleness are shown to be balanced at a high level by including not less than 0.003 wt% of Nb.

$$Ti/Nb \geq 7$$

The press formability is improved by composite addition of Ti and Nb instead of single addition. Particularly, Δr is considerably small when Ti and Nb are added together, which acts to considerably improve the press formability. This effect can more surely be attained by the composite addition of Ti and Nb under a condition satisfying $Ti/Nb \geq 7$.

B: 0.0002-0.005 wt%;

B is an element effective for improving the resistance to secondary work brittleness after the deep drawing. The effect is not obtained in an amount of less than 0.0002 wt%, while the excessive addition degrades the deep-drawing formability. The addition amount is 0.0002-0.005 wt%, preferably 0.0003-0.003 wt%.

Mo: 0.01-5.0 wt%, preferably 0.1-3.0 wt%;

Mo is an element improving the press formability (r-value, Δr , resistance to secondary work brittleness) and the corrosion resistance, and is added selectively. The improvement of r-value and Δr by the addition of Mo is due to the fact that the recrystallisation grain elongation rate is near to 1 together with the fine formation of recrystallization grains in the annealed sheet. The effect is obtained in an amount of not less than 0.01 wt%, but the addition exceeding 5.0 wt%

brings about the degradation of deep-drawing formability, so that the addition amount of Mo is 0.01-5.0 wt%. Moreover, the preferable addition amount is 0.1-3.0 wt%.

Ca: 0.0005-0.01 wt%

5

Ca is an element having an effect of controlling nozzle clogging with Ti inclusion in the steel making and casting and is selectively added in accordance with the Ti content. However, when Ca is excessively added, Ca inclusion is a starting point of brittle breakage, so that the addition range of Ca is 0.0005-0.01 wt%, preferably 0.0005-0.006 wt%.

10 Se: 0.0005-0.025 wt%

Se is an important element enhancing the flowability of welded metal in the welding to control surface defect (crack) of weld portion and improve the ductility of the weld portion. This effect appears in an amount of not less than 0.0005 wt%, but when it exceeds 0.025 wt%, the corrosion resistance lowers, so that the addition range of Se is 0.0005-0.025 wt%, preferably 0.0008-0.010 wt%.

15 The object of the invention is attained by the above chemical ingredients, but the effect of the invention is not lost even if 0.01-0.5 wt% of V, 0.3-6 wt% of Ni, 0.3-6 wt% of Co, 0.1-3 wt% of Cu, 0.3-6 wt% of W are added in addition to these ingredients.

The production of the steel sheet according to the invention may be carried out by a method wherein steel having the above chemical composition is melted in a usual steel-making furnace such as convertor, electric furnace or the like, shaped into a steel slab by continuous casting process or steel ingot process, and then subjected to hot rolling - (annealing of hot rolled sheet) - pickling - cold rolling - annealing of cold rolled sheet - pickling - if necessary, repetition of cold rolling - annealing - pickling.

25 However, the object can more advantageously be attained when the roll diameter of cold rolling work roll and the reduction of cold rolling are controlled to roll diameter: not less than 150 mm, preferably 250-1000 mm, and reduction: not less than 30%, preferably 40-95% among cold rolling conditions in the above cold rolling step. That is, the cold rolled stainless steel sheet is generally rolled through work rolls having a roll diameter of not more than 100 mm. When the roll diameter is made larger as mentioned above, the shearing stress in the rolling direction through friction between the roll and the steel sheet surface is mitigated and also the difference of stress in the sheet surface becomes small. As a result, the r-value and Δr can be more improved without degrading the resistance to secondary work brittleness. In this case, when the roll diameter is less than 150 mm, or when the reduction is less than 30% even if the roll diameter is not less than 150 mm, the effect is insufficient, while when the roll diameter exceeds 1000 mm, the power required for driving such a roll becomes excessive and economically disadvantageous, and if the reduction through this roll exceeds 95%, the surface properties tend to be degraded due to the sticking between the roll and the steel sheet.

35

EMBODIMENTS

Example 1

40 A steel having a chemical composition as shown in Tables 1, 2, and 3 is melted in a convertor and rendered into a steel slab through secondary refining, which is heated to 1250°C and hot rolled to obtain a hot rolled sheet having a thickness of 4.0 mm. The hot rolled sheet is subjected to annealing of hot rolled sheet (800-950°) - pickling - cold rolling - annealing of cold rolled sheet (800-950°C) - pickling to obtain a cold rolled steel sheet having a thickness of 0.7 mm. The deep-drawing formability (r-value, Δr) and the resistance to secondary work brittleness are measured with respect to the steel sheets obtained by the above method as a test specimen, and the ductility of weld portion is measured with respect to a part of the steel sheets according to the following method.

50

55

Table I
Chemical composition (wt%)

| Steel | C | Si | Mn | P | S | AL | N | Cr | Ti | Nb | B | Ca | Mo | 4(C+H) | Ti/Nb | Remarks |
|-------|-------|------|------|-------|-------|-------|--------|------|-------|-------|--------|--------|------|--------|-------|---------------------|
| 1 | 0.011 | 0.43 | 0.46 | 0.032 | 0.004 | 0.030 | 0.0115 | 11.2 | 0.153 | 0.005 | 0.0006 | 0.0015 | — | 0.0900 | 31 | Acceptable Examples |
| 2 | 0.010 | 0.21 | 0.32 | 0.037 | 0.006 | 0.025 | 0.0091 | 10.9 | 0.206 | 0.012 | 0.0008 | — | — | 0.0764 | 17 | |
| 3 | 0.010 | 0.39 | 0.28 | 0.021 | 0.008 | 0.031 | 0.0081 | 16.7 | 0.103 | 0.008 | 0.0004 | 0.0023 | — | 0.0724 | 13 | |
| 4 | 0.014 | 0.62 | 0.19 | 0.018 | 0.005 | 0.046 | 0.0088 | 16.9 | 0.151 | 0.017 | 0.0005 | 0.0018 | — | 0.0912 | 9 | |
| 5 | 0.014 | 0.20 | 0.26 | 0.017 | 0.011 | 0.002 | 0.0072 | 17.3 | 0.161 | 0.003 | 0.0011 | 0.0006 | 0.13 | 0.0848 | 54 | |
| 6 | 0.009 | 0.18 | 0.30 | 0.019 | 0.005 | 0.025 | 0.0066 | 17.0 | 0.149 | 0.010 | 0.0008 | — | 0.98 | 0.0624 | 15 | |
| 7 | 0.010 | 0.31 | 0.15 | 0.029 | 0.004 | 0.001 | 0.0076 | 16.8 | 0.152 | 0.018 | 0.0015 | 0.0030 | — | 0.0704 | 8 | |
| 8 | 0.007 | 0.15 | 0.56 | 0.029 | 0.013 | 0.031 | 0.0085 | 17.2 | 0.093 | 0.004 | 0.0025 | 0.0041 | 0.31 | 0.0620 | 23 | |
| 9 | 0.012 | 0.20 | 0.23 | 0.030 | 0.004 | 0.029 | 0.0034 | 17.0 | 0.131 | 0.009 | 0.0040 | 0.0020 | — | 0.0616 | 15 | |
| 10 | 0.010 | 0.20 | 0.17 | 0.024 | 0.007 | 0.038 | 0.0088 | 16.5 | 0.283 | 0.006 | 0.0010 | 0.0053 | — | 0.0752 | 37 | |
| 11 | 0.015 | 0.19 | 0.42 | 0.018 | 0.006 | 0.056 | 0.0089 | 17.2 | 0.309 | 0.013 | 0.0008 | 0.0080 | — | 0.0956 | 24 | |
| 12 | 0.006 | 0.23 | 0.15 | 0.023 | 0.002 | 0.023 | 0.0063 | 30.5 | 0.103 | 0.007 | 0.0004 | — | — | 0.0492 | 15 | |
| 13 | 0.002 | 0.32 | 0.19 | 0.042 | 0.002 | 0.007 | 0.0071 | 39.2 | 0.162 | 0.015 | 0.0015 | 0.0015 | — | 0.0364 | 11 | |
| 14 | 0.007 | 0.17 | 0.13 | 0.020 | 0.002 | 0.013 | 0.0090 | 51.3 | 0.125 | 0.010 | 0.0007 | 0.0021 | — | 0.0640 | 13 | |
| 15 | 0.011 | 0.26 | 0.21 | 0.019 | 0.004 | 0.011 | 0.0073 | 17.0 | 0.231 | 0.005 | 0.0006 | 0.0010 | 2.56 | 0.0732 | 46 | |
| 16 | 0.005 | 0.31 | 0.25 | 0.020 | 0.005 | 0.009 | 0.0081 | 30.0 | 0.119 | 0.010 | 0.0009 | 0.0019 | 0.79 | 0.0524 | 12 | |

Table 2

Chemical composition (wt%)

| Steel | C | Si | Mn | P | S | Al | N | Cr | Ti | Nb | B | Ca | Mo | Se | 4(C+N) | Ti/Nb | Remarks |
|-------|-------|------|------|-------|-------|-------|--------|------|-------|-------|--------|--------|------|--------|--------|-------|---------------------|
| 17 | 0.007 | 0.30 | 0.30 | 0.021 | 0.005 | 0.020 | 0.0076 | 7.0 | 0.153 | 0.011 | 0.0009 | 0.0010 | — | — | 0.0508 | 14 | Acceptable Examples |
| 18 | 0.005 | 0.23 | 0.23 | 0.018 | 0.005 | 0.006 | 0.0103 | 11.3 | 0.153 | 0.009 | 0.0011 | — | 0.02 | — | 0.0512 | 17 | |
| 19 | 0.010 | 0.10 | 0.18 | 0.023 | 0.009 | 0.030 | 0.0073 | 11.1 | 0.224 | 0.015 | 0.0009 | — | 0.21 | — | 0.0692 | 15 | |
| 20 | 0.008 | 0.35 | 0.40 | 0.011 | 0.006 | 0.028 | 0.0059 | 18.0 | 0.126 | 0.010 | 0.0020 | — | 0.03 | — | 0.0556 | 13 | |
| 21 | 0.020 | 0.26 | 0.26 | 0.030 | 0.008 | 0.035 | 0.0121 | 17.9 | 0.253 | 0.015 | 0.0015 | — | 2.11 | — | 0.1284 | 17 | |
| 22 | 0.009 | 0.22 | 0.30 | 0.019 | 0.007 | 0.022 | 0.0054 | 30.2 | 0.103 | 0.007 | 0.0013 | — | 0.04 | — | 0.0576 | 15 | |
| 23 | 0.005 | 0.25 | 0.15 | 0.026 | 0.006 | 0.015 | 0.0103 | 30.3 | 0.159 | 0.015 | 0.0006 | — | 0.53 | — | 0.0612 | 11 | |
| 24 | 0.016 | 0.19 | 0.41 | 0.026 | 0.007 | 0.030 | 0.0083 | 18.0 | 0.162 | 0.011 | 0.0013 | — | 0.05 | 0.0013 | 0.0972 | 15 | |
| 25 | 0.015 | 0.23 | 0.26 | 0.030 | 0.005 | 0.016 | 0.0099 | 17.9 | 0.190 | 0.009 | 0.0009 | — | 2.03 | 0.0025 | 0.0996 | 21 | |
| 26 | 0.009 | 0.19 | 0.22 | 0.028 | 0.005 | 0.017 | 0.0039 | 17.6 | 0.151 | 0.006 | 0.0018 | 0.0015 | — | 0.0023 | 0.0516 | 25 | |
| 27 | 0.005 | 0.26 | 0.31 | 0.015 | 0.004 | 0.011 | 0.0041 | 18.2 | 0.126 | 0.009 | 0.0020 | 0.0020 | 0.03 | 0.0011 | 0.0364 | 14 | |
| 28 | 0.009 | 0.10 | 0.11 | 0.030 | 0.006 | 0.009 | 0.0093 | 18.0 | 0.181 | 0.015 | 0.0007 | 0.0010 | 1.84 | 0.0052 | 0.0732 | 12 | |
| 29 | 0.011 | 0.36 | 0.38 | 0.022 | 0.006 | 0.023 | 0.0086 | 16.9 | 0.201 | 0.007 | 0.0011 | — | — | 0.0008 | 0.0784 | 29 | |
| 30 | 0.009 | 0.33 | 0.29 | 0.028 | 0.005 | 0.022 | 0.0043 | 17.0 | 0.180 | 0.006 | 0.0008 | 0.0009 | 2.12 | 0.0029 | 0.0532 | 30 | |
| 31 | 0.011 | 0.36 | 0.41 | 0.022 | 0.006 | 0.023 | 0.0080 | 11.0 | 0.153 | 0.009 | 0.0013 | — | — | 0.0013 | 0.0760 | 17 | |

Table 3

Chemical composition (wt%)

| Steel | C | Si | Mn | P | S | Al | N | Cr | Ti | Nb | B | Ca | Mo | 4(C+N) | Ti/Nb | Remarks |
|-------|-------|------|------|-------|-------|-------|--------|------|-------|-------|--------|--------|------|--------|-------|----------------------|
| 32 | 0.017 | 0.25 | 0.42 | 0.025 | 0.007 | 0.051 | 0.0086 | 11.0 | 0.142 | 0.001 | 0.0007 | 0.0023 | — | 0.1024 | 142 | Comparative Examples |
| 33 | 0.013 | 0.41 | 0.19 | 0.028 | 0.004 | 0.026 | 0.0060 | 16.8 | 0.128 | 0.001 | 0.0001 | — | — | 0.0760 | 128 | |
| 34 | 0.015 | 0.23 | 0.25 | 0.019 | 0.004 | 0.030 | 0.0073 | 17.0 | 0.133 | 0.001 | 0.0003 | 0.0018 | — | 0.0892 | 133 | |
| 35 | 0.011 | 0.36 | 0.31 | 0.023 | 0.005 | 0.005 | 0.0088 | 17.1 | 0.129 | 0.002 | 0.0010 | — | 0.13 | 0.0792 | 129 | |
| 36 | 0.009 | 0.25 | 0.26 | 0.022 | 0.008 | 0.032 | 0.0079 | 17.0 | 0.118 | 0.001 | 0.0020 | 0.0053 | — | 0.0676 | 118 | |
| 37 | 0.012 | 0.32 | 0.25 | 0.022 | 0.007 | 0.025 | 0.0056 | 16.9 | 0.283 | 0.001 | 0.0001 | 0.0022 | 1.01 | 0.0704 | 283 | |
| 38 | 0.010 | 0.19 | 0.30 | 0.021 | 0.003 | 0.036 | 0.0091 | 17.3 | 0.309 | 0.001 | 0.0009 | 0.0018 | — | 0.0764 | 309 | |
| 39 | 0.005 | 0.15 | 0.22 | 0.019 | 0.010 | 0.010 | 0.0071 | 30.5 | 0.130 | 0.001 | 0.0009 | 0.0026 | — | 0.0484 | 130 | |
| 40 | 0.006 | 0.18 | 0.22 | 0.026 | 0.002 | 0.025 | 0.0069 | 51.0 | 0.129 | 0.001 | 0.0008 | 0.0017 | — | 0.0516 | 129 | |
| 41 | 0.009 | 0.29 | 0.26 | 0.021 | 0.005 | 0.020 | 0.0083 | 7.1 | 0.143 | 0.001 | 0.0010 | 0.0012 | — | 0.0692 | 142 | |
| 42 | 0.006 | 0.28 | 0.33 | 0.022 | 0.005 | 0.060 | 0.0093 | 17.9 | 0.001 | 0.171 | 0.0009 | — | — | 0.0612 | < 1 | |
| 43 | 0.011 | 0.30 | 0.16 | 0.015 | 0.006 | 0.033 | 0.0058 | 18.2 | 0.001 | 0.018 | 0.0011 | — | — | 0.0672 | < 1 | |

55 • r-value, Δr

A test specimen of JIS No. 5 is cut out from the steel sheet in a rolling direction, a direction of 45° with respect to the rolling direction or a direction of 90° with respect to the rolling direction. A uniaxial tensile prestrain of 5-15% is

EP 0 727 502 A1

applied to each of these test specimens, during which a Lankford value in each direction is measured from a ratio of lateral strain and thickness strain and calculated according to the following equation:

$$r = (r_L + 2r_D + r_T)/4$$

$$\Delta r = (r_L - 2r_D + r_T)/2$$

wherein r_L , r_D and r_T show Lankford values in the rolling direction, direction of 45° with respect to the rolling direction and direction of 90° with respect to the rolling direction, respectively.

- Resistance to secondary work brittleness

A cup-shaped test specimen subjected to deep drawing at a drawing ratio of 2 is held at a particular temperature of -100°C - 20°C, and thereafter an impact load is applied to a head portion of the cup according to a drop weight test (weight: 5 kg, dropping difference: 0.8 m), during which a crack creating temperature is measured from the presence or absence of brittle crack at a sidewall portion of the cup.

In each of all steels, the test is conducted with respect to two specimens every temperature interval of 5°C. A temperature when the brittle crack is created in one of the two specimens is the crack creating temperature.

- Ductility of weld portion

The cold rolled steel sheet (thickness: 0.7 mm) is welded through TIG welding method, from which is taken out a strip-shaped test specimen of 15 mm x 70 mm arranging a weld portion in center. The test specimen is subjected to a repetitive bending test (see Fig. 3) repeating bending - returning operation 20 times, during which the occurrence of cracking from the weld portion is observed. This test is carried out with respect to 20 specimens of each of the test steels, and the crack creating ratio is measured from the number of cracked specimens.

The test results are shown in Table 4.

Table 4

| Steel No | Diameter of cold rolling roll (mm) | r-value | Δr | Crack creating temperature (°C) | Bending crack of bead (%) | Re-marks | Steel No | Diameter of cold rolling roll (mm) | r-value | Δr | Crack creating temperature (°C) | Bending crack of bead (%) | Re-marks |
|----------|------------------------------------|---------|------------|---------------------------------|---------------------------|-------------|----------|------------------------------------|---------|------------|---------------------------------|---------------------------|--------------|
| 1 | 180 | 1.72 | 0.14 | -70 | - | Ac-ceptable | 2 3 | 180 | 1.82 | 0.03 | -65 | - | Ac-ceptable |
| 2 | 180 | 1.76 | 0.11 | -75 | - | | 2 4 | 180 | 1.79 | 0.05 | -70 | 0 | |
| 3 | 180 | 1.65 | 0.12 | -60 | - | | 2 5 | 180 | 1.86 | 0.03 | -70 | 0 | |
| 4 | 300 | 1.68 | 0.04 | -65 | - | Ac-ceptable | 2 6 | 180 | 1.61 | 0.10 | -65 | 0 | Ex-ample |
| 5 | 180 | 1.63 | 0.09 | -65 | - | | 2 7 | 180 | 1.81 | 0.06 | -70 | 0 | |
| 6 | 180 | 1.65 | 0.07 | -75 | - | | 2 8 | 180 | 1.90 | 0.09 | -65 | 0 | |
| 7 | 80 | 1.63 | 0.07 | -80 | - | Ex-ample | 2 9 | 180 | 1.73 | 0.10 | -60 | 5 | Com-parative |
| 8 | 180 | 1.59 | 0.10 | -80 | - | | 3 0 | 180 | 1.69 | 0.15 | -65 | 0 | |
| 9 | 180 | 1.58 | 0.13 | -85 | - | | 3 1 | 180 | 1.79 | 0.12 | -70 | 0 | |
| 1 0 | 80 | 1.56 | 0.24 | -55 | - | Ex-ample | 3 2 | 180 | 1.61 | 0.41 | -60 | - | Ex-ample |
| 1 1 | 80 | 1.62 | 0.11 | -60 | - | | 3 3 | 180 | 1.60 | 0.42 | -5 | - | |
| 1 2 | 180 | 1.53 | 0.14 | -50 | - | | 3 4 | 80 | 1.47 | 0.45 | -45 | - | |
| 1 3 | 80 | 1.53 | 0.19 | -55 | - | Ex-ample | 3 5 | 80 | 1.45 | 0.41 | -55 | - | Ex-ample |
| 1 4 | 180 | 1.55 | 0.14 | -50 | - | | 3 6 | 80 | 1.41 | 0.43 | -60 | - | |
| 1 5 | 300 | 1.56 | 0.15 | -55 | - | | 3 7 | 180 | 1.63 | 0.41 | 15 | - | |
| 1 6 | 180 | 1.53 | 0.17 | -50 | - | Ex-ample | 3 8 | 300 | 1.45 | 0.50 | -40 | - | Ex-ample |
| 1 7 | 180 | 1.73 | 0.11 | -75 | - | | 3 9 | 180 | 1.38 | 0.43 | -35 | - | |
| 1 8 | 180 | 1.95 | 0.03 | -75 | - | | 4 0 | 180 | 1.25 | 0.63 | -25 | - | |
| 1 9 | 180 | 2.01 | 0.02 | -80 | - | Ex-ample | 4 1 | 180 | 1.68 | 0.43 | -55 | - | Ex-ample |
| 2 0 | 180 | 1.80 | 0.04 | -70 | - | | 4 2 | 180 | 1.28 | 0.50 | -40 | 30 | |
| 2 1 | 180 | 1.85 | 0.02 | -70 | - | | 4 3 | 180 | 0.93 | 0.71 | -40 | 30 | |
| 2 2 | 180 | 1.76 | 0.05 | -65 | - | | | | | | | | |

As seen from Table 4, the steel sheets according to the invention exhibit properties that the r-value is not less than 1.5, Δr is not more than 0.3 and the crack creating temperature indicating the resistance to secondary work brittleness is not higher than -50°C, so that they have excellent deep-drawing formability and resistance to secondary work brittleness as compared with the comparative examples.

Furthermore, in the steel sheets containing Se according to the invention, the cracking ratio of bead is not more than 10% in addition to the above properties.

Example 2

5

Among the steels shown in Table 1, each of steel Nos. 1 and 6 is melted in a converter and subjected to secondary refining to obtain a steel slab, which is then heated to 1250°C and hot rolled to obtain a hot rolled sheet having a thickness of 4.0 mm. The hot rolled sheet is rendered into a cold rolled sheet having a thickness of 0.7 mm through annealing of hot rolled sheet (800-950°C) - pickling - cold rolling - annealing of cold rolled sheet (800-950°C) - pickling. In this case, the cold rolling step of from 4.0 mm → 0.7 mm in thickness (total reduction: 82.5%) is divided into a cold rolling stage I (thickness: 4 mm → X mm) and a cold rolling stage II (thickness: X mm → 0.7 mm), and the rollings of these stages are carried out under various roll diameter and reduction conditions. A test specimen is taken out from the resulting steel sheet and then subjected to the same tests as in Example 1 for the evaluation of the properties. The results are shown in Table 5 together with the rolling conditions.

15

Tble 5

| Run No | Cold rolling condition | | | | Steel No : 1 | | | Steel No : 6 | | |
|--------|------------------------|---------------|--------------------|---------------|--------------|------|---------------------------------|--------------|------|---------------------------------|
| | Stage I | | Stage II | | r-value | Δr | Crack creating temperature (°C) | r-value | Δr | Crack creating temperature (°C) |
| | Roll diameter (mm) | Reduction (%) | Roll diameter (mm) | Reduction (%) | | | | | | |
| 1 | 80 | 82.5 | - | - | 1.70 | 0.24 | -70 | 1.62 | 0.12 | -75 |
| 2 | 180 | 20.0 | 80 | 78.2 | 1.70 | 0.23 | -70 | 1.63 | 0.11 | -75 |
| 3 | 180 | 35.0 | 80 | 73.1 | 1.81 | 0.12 | -70 | 1.70 | 0.07 | -75 |
| 4 | 180 | 50.0 | 80 | 65.0 | 1.82 | 0.10 | -70 | 1.70 | 0.06 | -75 |
| 5 | 180 | 82.5 | - | - | 1.85 | 0.08 | -75 | 1.71 | 0.05 | -75 |
| 6 | 300 | 35.0 | 80 | 73.1 | 1.75 | 0.13 | -75 | 1.70 | 0.06 | -80 |

As seen from Table 5, all of the steel sheets have more excellent deep-drawing formability and resistance to secondary work brittleness.

INDUSTRIAL APPLICABILITY

As mentioned above, the chromium steel sheets according to the invention have press formability, which has not been obtained in the conventional chromium steel sheet, i.e. excellent deep-drawing formability and resistance to secondary work brittleness, which are useful in the press forming. In the chromium steel sheets according to the invention, therefore, it is possible to conduct the severer deep drawing for kitchenwares such as deep drop sink and the like, automobile parts such as fuel case and the like, and also it is possible to prevent the occurrence of brittle crack in subsequent secondary work.

50

Claims

1. A chromium steel sheet having an excellent press formability and comprising;

C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%, and the balance being Fe and inevitable impurities.

2. A chromium steel sheet having an excellent press formability and comprising;
C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%, Mo: 0.01-5.0 wt%,
5 and the balance being Fe and inevitable impurities.
3. A chromium steel sheet having an excellent press formability and comprising;
C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%, Ca: 0.0005-0.01 wt%,
10 and the balance being Fe and inevitable impurities.
4. A chromium steel sheet having an excellent press formability and comprising;
C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%, Se: 0.0005-0.025 wt%,
15 and the balance being Fe and inevitable impurities.
5. A chromium steel sheet having an excellent press formability and comprising;
C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%, Mo: 0.01-5.0 wt%, Ca: 0.0005-0.01 wt%,
20 and the balance being Fe and inevitable impurities.
6. A chromium steel sheet having an excellent press formability and comprising;
C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%, Mo: 0.01-5.0 wt%, Se: 0.0005-0.025 wt%,
25 and the balance being Fe and inevitable impurities.
7. A chromium steel sheet having an excellent press formability and comprising;
C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%, Ca: 0.0005-0.01 wt%, Se: 0.0005-0.025 wt%,
30 and the balance being Fe and inevitable impurities.
8. A chromium steel sheet having an excellent press formability and comprising;
C: not more than 0.03 wt%, Si: not more than 1.0 wt%, Mn: not more than 1.0 wt%, P: not more than 0.05 wt%, S: not more than 0.015 wt%, Al: not more than 0.10 wt%, N: not more than 0.02 wt%, Cr: 5-60 wt%, Ti: 4(C+N) - 0.5 wt%, Nb: 0.003-0.020 wt%, B: 0.0002-0.005 wt%, Mo: 0.01-5.0 wt%, Ca: 0.0005-0.01 wt%, Se: 0.0005-0.025 wt%,
35 and the balance being Fe and inevitable impurities.
9. A chromium steel sheet according to anyone of claims 2, 5, 6 and 8, wherein Mo content is 0.1-3.0 wt%.
10. A chromium steel sheet according to anyone of claims 1 to 9, wherein a relationship between Ti content and Nb content satisfies $Ti/Nb \geq 7$.

Fig. 1

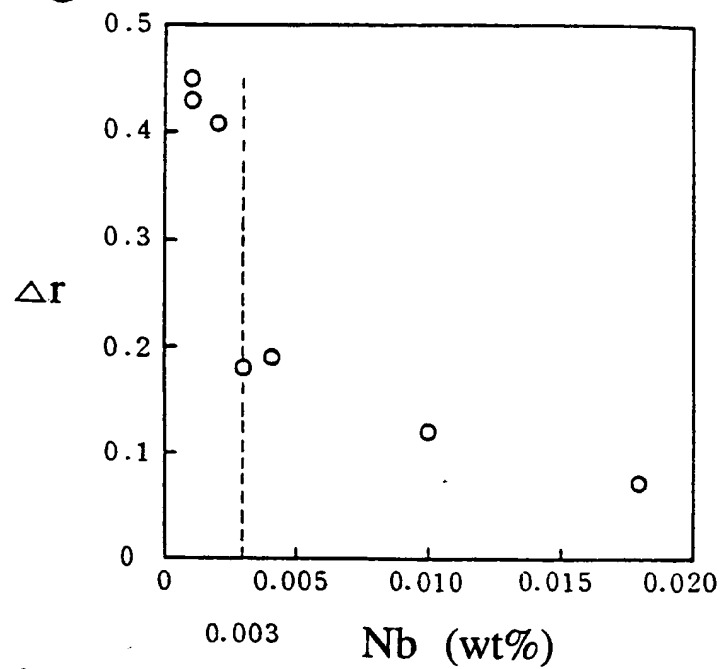


Fig. 2


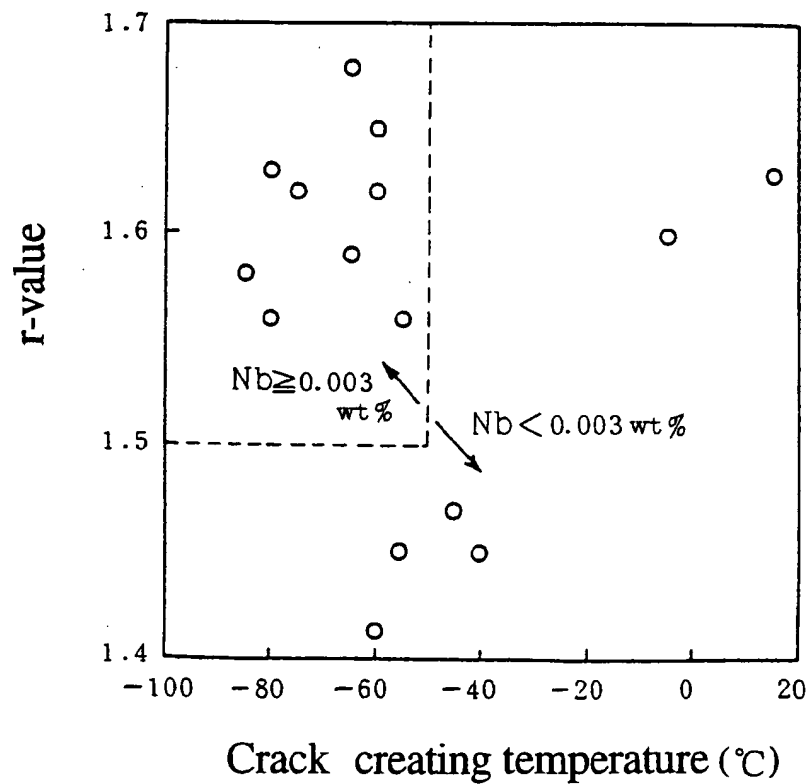


Fig. 3

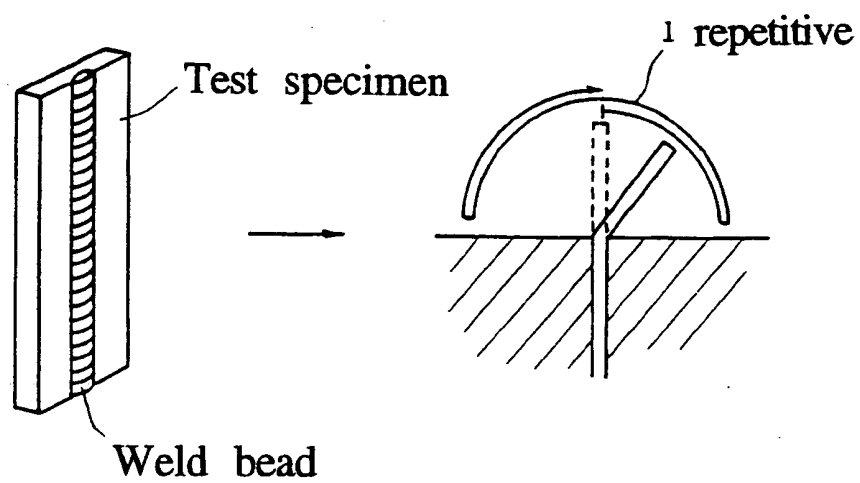

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP95/01341

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl⁶ C22C38/00, 302, 38/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int. Cl⁶ C22C38/00-38/60

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1926 - 1995

Kokai Jitsuyo Shinan Koho 1971 - 1995

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| Y | JP, 4-232231, A (Nisshin Steel Co., Ltd.), August 20, 1992 (20. 08. 92), Lines 2 to 46, column 1, page 2, table 1, lines 45 to 50, column 4, page 3 (Family: none) | 1 - 8 |
| Y | JP, 2-61033, A (Kawasaki Steel Corp.), March 1, 1990 (01. 03. 90), Line 5, lower left column to line 9, lower right column, page 1, line 9, upper right column to table 1, line 11, lower left column, page 2 (Family: none) | 1 - 10 |
| Y | JP, 5-195078, A (Nisshin Steel Co., Ltd.), August 3, 1993 (03. 08. 93), Table 1, lines 2 to 28, column 1, page 2 (Family: none) | 1 - 8 |
| Y | JP, 5-132740, A (Nisshin Steel Co., Ltd.), May 28, 1993 (28. 05. 93), Table 1, lines 2 to 40, column 1, page 2 | 1 - 10 |

☒ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

August 18, 1995 (18. 08. 95)

Date of mailing of the international search report

October 3, 1995 (03. 10. 95)

Name and mailing address of the ISA/

Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP95/01341

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| | (Family: none) | |
| Y | By the 19th Committee in Steelmaking of Japan Society for the Promotion of Science "Steel and Alloy Elements (upper)" February 28, 1966 (28. 02. 66) Seibundo Shinkosha, P. 223 | 3, 5, 7, 8 |
| A | JP, 5-287446, A (Kawasaki Steel Corp.), November 2, 1993 (02. 11. 93), Line 2, column 1 to line 12, column 2, page 2, lines 10 to 24, column 5, page 4 (Family: none) | 1 - 10 |
| A | By the 19th Committee in Steelmaking of Japan Society for the Promotion of Science "Steel and Alloy Elements (lower)" Seibundo Shinkosha, P. 281 | 4, 6, 7, 8 |

Form PCT/ISA/210 (continuation of second sheet) (July 1992)